
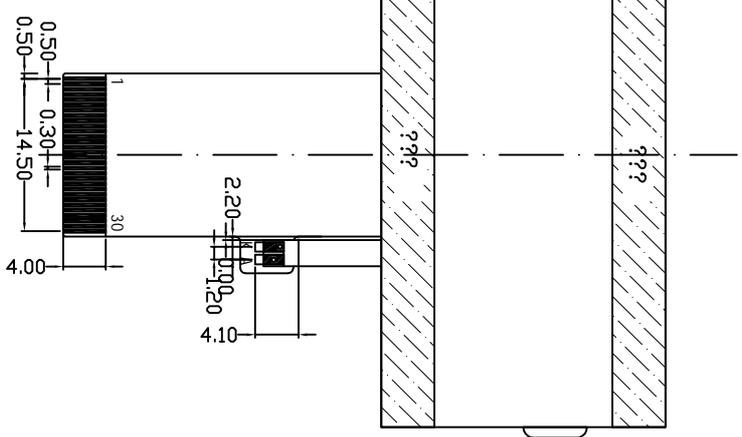
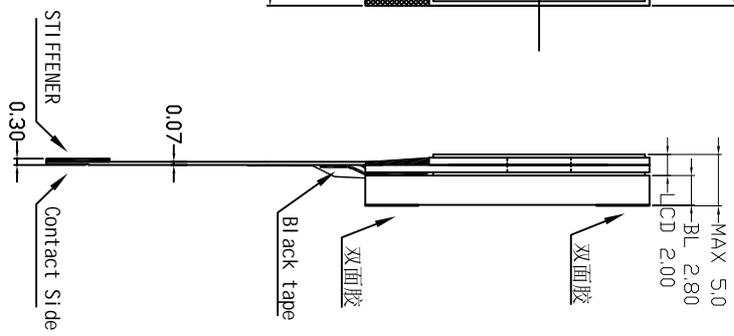


VER	DETAIL DESCRIPTION	DATE
△	The First Ammendment	2015-07-29


客户确认签名/
Customer signature

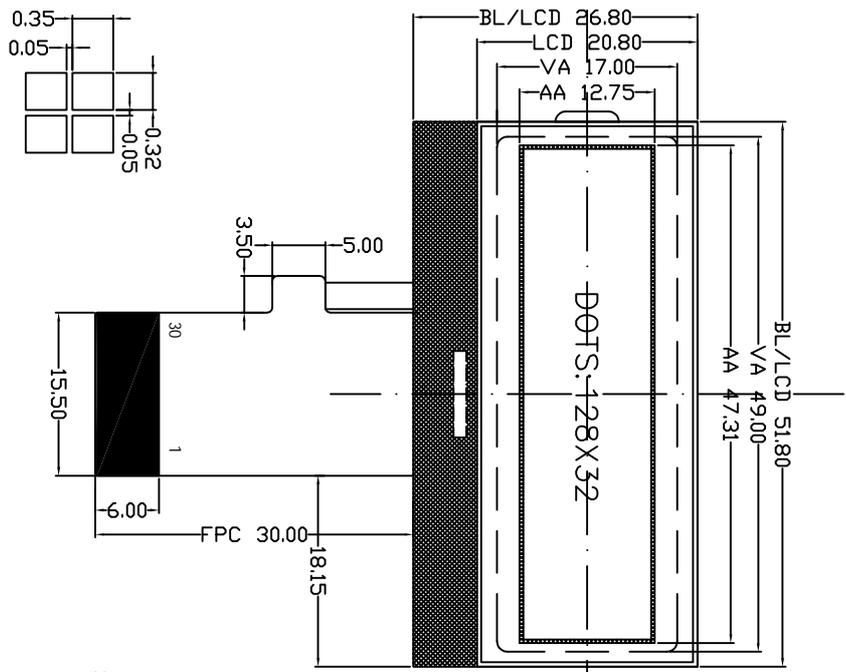


Detail A (10:1)

ITEM	PARAMETERS	ITEM	PARAMETERS
OPERATING VOLTAGE	5.0V	OPERATING TEMP	-20°C ~ 70°C
OPERATING CURRENT	10mA	STORAGE TEMP	-30°C ~ 80°C
LCD DRIVE VOLTAGE	5.0V	BACKLIGHT	WHITE, 2PCS LED, 30MA
DISPLAY MODE	STN Blue Negative Transmiss	MOHS STANDARD	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>
LCD DRIVE METHOD	DDUTY?1/32; BIAS?1/7	CONNECTOR TYPE	FPC
Driver/Controller	ST7565R	OTHER	--
VIEW DIRECTION	6:00 O'CLOCK		

PIN	SYMBOL	Example:
1	/SI	P3.0
2	/RES	P3.1 6800时序
3	A0	P3.2 测试接线
4	/MR	P3.3
5	/RD	P3.4
6-13	00-07	P1.0-P1.7
14	VDD	3.3V
15	VSS	
16	VOUT	
17	CP3	
18	CM	
19	CP1	C=1uF
20	CP2	
21	CM2	
22	V1	
23	V2	
24	V3	
25	V4	
26	V0	
27	CS6	
28	P/S	3.3V
29	K	
30	A	6-20R 3.3V

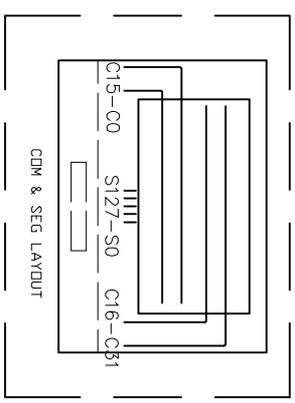

Circuit Diagram



名称	F0G工程图
编号	W/YM12832K1
版本	1.0
绘图	
审批	
日期	2015-07-29